


Painted steel model
shown with T31P indicator

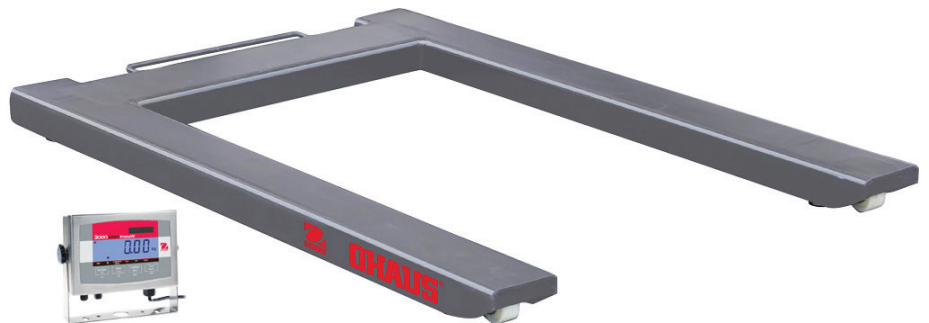

Stainless steel model
shown with T32XW indicator

Affordability, Durability, OHAUS Quality & Value

The OHAUS VE Series U-Frame Pallet Scales are the value solution for your dry or washdown weighing needs in industrial and commercial applications. Their high-quality material and construction are designed for years of trouble-free service. Together with mobility features such as lifting handle and front-mounted rollers, the OHAUS VE Series U-Frame Pallet Scales offers a unique combination of convenience, value and quality that your company can depend on.

Standard Features Include:

- Popular 1500kg capacity model
- Painted carbon steel and stainless steel models with handle and rollers for convenient lifting and relocation
- Two rugged OHAUS indicator models:
 - T31P indicator features a high-impact ABS housing with key-holes on the rear cover for wall mounting
 - T32XW indicator features a 304 stainless steel IP65 housing
- Four OIML R60 approved IP67 alloy steel load cells
- Four load cell mounted feet, self-swiveling ball-in-cup design
- IP65 dust and water immersion protected stainless steel junction box
- Available second stage verified scale models 1:3000e with OHAUS indicators
- OHAUS indicators featuring backlit LCD displays with high-visibility 25mm high digits, five weighing units (kg, g, lb, oz, lb:oz), RS232, rechargeable lead acid battery operation and piece counting functions.

VE Series U-Frame Pallet Scales

Platform Models	VE1500P	VE1500PW
Net Weight	51kg	47kg
External Dimensions	1260L x 840W x 90minH mm	
Scale Models	VE1500P31P	VE1500P32XW
Scale Models , Class III, EC Type approved, 2nd Stage	VE1500P31PM	VE1500P32XWM
Platform Material	Carbon steel, painted	Stainless steel, sand-blasted
Capacity × Readability	1500 kg × 0.5 kg	
Approval Resolution	1:3000e	
Maximum Central Load	2250 kg	
Operating Temperature / Humidity	-10°C to 40°C / 0% to 95% relative humidity, non-condensing	
Load Cell	4 × IP67 alloy steel, shear beam, OIML C3	
Load Cell Capacity Emax	1000kg	
Output Impedance / Excitation Voltage	350 ohm ± 3.5 ohm / 5V~15V, DC/AC	
Feet	2 × front edge rollers with 4 × self-swiveling ball-in-cup design with rubber bottom	
Junction Box	Rear-access, IP65, 304 stainless steel, 194L × 130W × 45H mm, with 5m long cable	
Other Features	Integrated lifting handle, external level indicator	
Indicators	T31P, ABS plastic	T32XW, 304 stainless steel IP65 PCB housing
Weighing Units	kg, g, lb, oz, lb:oz	
Display	Backlit LCD, 25 mm high, 6-digit, 7-segment	
Interface	Built-in RS232C, bi-directional	
Power	AC adapter	Universal switching power supply
Battery	Internal rechargeable sealed lead acid battery (T31P: 100 hour / T32XW: 58-hour typical operation on full charge)	
Other Indicator Features	Piece Counting 1d min APW, Geographical gravity adjustment, Environmental filtering	

Options and Accessories


Wall mount bracket kit, T31P	80251747
Wall mount bracket kit, T32XW	80251748
Foot plate kit, VE painted steel	72198344
Foot plate kit, VE-W stainless steel	72198345

Construction and Other Features



Handle and front-mounted rollers for convenient lifting and relocation of the scale

Outline Dimensions

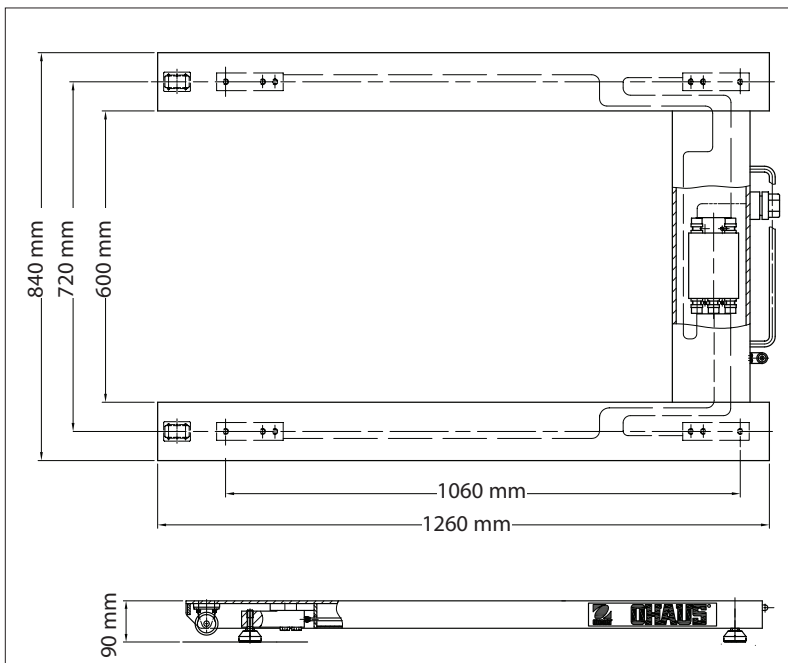

Approvals:

- **Safety and EMC:** EN60950, EN61326, FCC, CE, CULUS
- **EC Type Approval:**
 - T31xx Series Indicator: TC7085 / T5980
 - T32XWxx Series Indicator: TC7630 / T5980
 - Load Cell: OIML R60 PTB D09-03.19
- **Quality:** Ohaus quality management system registered to ISO 9001:2008

OHAUS Europe GmbH
Im Langacher 44
8606 Greifensee
Switzerland

e-mail: ssc@ohaus.com
Tel: 0041 22 567 53 19
e-mail: tsc@ohaus.com
Tel: 0041 22 567 53 20

www.ohaus.com

OHAUS Corporation is an ISO
9001:2008 manufacturer

ISO 9001:2008
Registered Quality
Management System

