


InLab[®] Smart Pro-ISM

pH Ref °C ISM



Digital electrode for general laboratory applications;
highly reproducible, maintenance-free and autoclavable

Scale 1:1

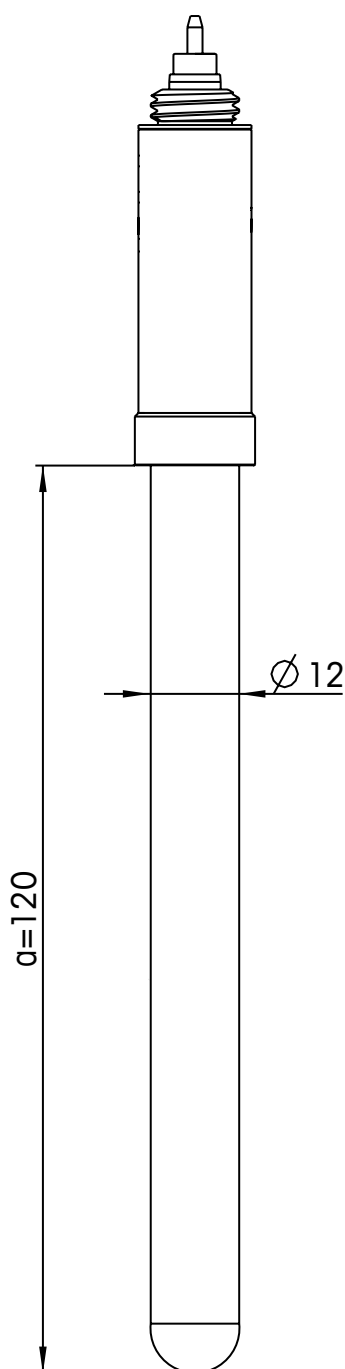

Sensor type combined pH electrode

Order number 30027775

Specifications

pH range 0...4
zero point (pH) 7.00 ± 0.25

temperature range 0...130 °C
temperature probe NTC 30 k Ω

shaft material glass
membrane glass HA
membrane resistance < 600 M Ω

reference system SteadyForce[™]
reference diaphragm ceramic
reference electrolyte DPA-gel
bridge electrolyte -

electrode head K8SD
cable length -
connector -

cell constant (cm⁻¹) -
cell type -

indicating metal -

Storage

InLab storage solution (30111142)
or 3 mol/L KCl (51350072)