



MS-2 / STX / S-10-P / S-10-L / S-10-2L / S-20-L / S-20-2L / ST-30B-2L / ST-30-2LR / ST-30-2LF / ST-30-2Led / ST-30-2LedR / ST-40B-2L / ST-40-2L / ST-45-2L / ST-50 / ST-50Led



STEREO Series

This series includes a wide selection of stereomicroscopes designed to satisfy every need in both teaching and amateur fields.

The whole range, from MS-2 to ST-50LED, is assembled according to the best technical standards. The optical system, thanks to its transparency, quality and depth, is at the top of its category.

The series is composed of 16 models, each one designed to satisfy multiple needs.

MS-2	Monoscope 20x.
STX	Stereomicroscope, LED incident illumination, powered by batteries (not included).
S-10-P	Stereomicroscope 20x.
S-10-L	Stereomicroscope 20x, tungsten incident illumination, inclined head.
S-10-2L	Stereomicroscope 20x, tungsten incident & transmitted illumination, inclined head.
S-20-L	Stereomicroscope 20x, tungsten incident illumination, inclined head.
S-20-2L	Stereomicroscope 20x, tungsten incident & transmitted illumination, inclined head.
ST-30B-2L	Stereomicroscope 10x-30x, tungsten incident & transmitted illumination, inclined head in rear position.
ST-30-2LR	Stereomicroscope 20x-40x, tungsten incident & transmitted illumination, inclined head in rear position.
ST-30-2LF	Stereomicroscope 20x-40x, tungsten incident & transmitted illumination, inclined head in front position.
ST-30-2Led	Stereomicroscope 20x-40x, LED incident & transmitted illumination, inclined head in front position.
ST-30-2LedR	Stereomicroscope 20x-40x, LED incident & transmitted illumination, inclined head in rear position.
ST-40B-2L	Stereomicroscope 10x-30x, tungsten incident & transmitted illumination, inclined head 360° rotating.
ST-40-2L	Stereomicroscope 20x-40x, tungsten incident & transmitted illumination, inclined head 360° rotating.
ST-45-2L	Stereomicroscope 20x-40x, halogen incident & transmitted illumination, inclined head 360° rotating.
ST-50Led	Stereomicroscope 20x, overhanging stand, LED incident illumination.
	///



STEREO Series



Versatility

The range includes a model, the ST-30-2Led, which allows you to work without worrying about the electrical power supply, thanks to its rechargable longlife battery. "Cold" light allows an excellent vision of the samples.

Heads

Binocular heads (except for MS-2 model). **ST-40B-2L**, **ST-40-2L** and **ST-45-2L** models have 360° rotating heads. All remaining models have fixed heads.

STX, S-10-P, S-10-L and S-10-2L models have vertical heads.

Specimen stage

All models have a specimen stage fitted with a black/white disc and specimen clips. Models with transmitted light have also a frosted disk.

Interpupillary distance

Binocular heads have an interpupillary distance adjustable between 51 and 75mm. Dioptric compensation adjustable on eyepiece tubes, except for MS-2 model.

Optical system

WF10x/20mm eyepieces. Supplied objective changes according to the model: 2x fixed objective or double selectable objective (2x-4x or 1x-3x).

Using additional eyepieces and objectives, it's possible to obtain up to 80 magnifications.

The **ST-50Led** model have a long working distance 2x objective (119 mm).

Illumination

The models with incident and/or transmitted light have 12V/10W tungsten bulbs. The **ST-45-2L** model is the only one supplied with halogen bulbs and brightness control.

ST-30-2Led, ST-30-2LedR and **ST-50Led** have LED illumination.

Focusing

Every model is equipped with focus adjustment knobs located on each side of the stand.







STEREO Series - Models





S-10-2L





S-10-P





STEREO Series - Models















ST-40-2L















ST-30-2LR









ST-30-2Led

















ST-45-2L















STX














STEREO Series - Models

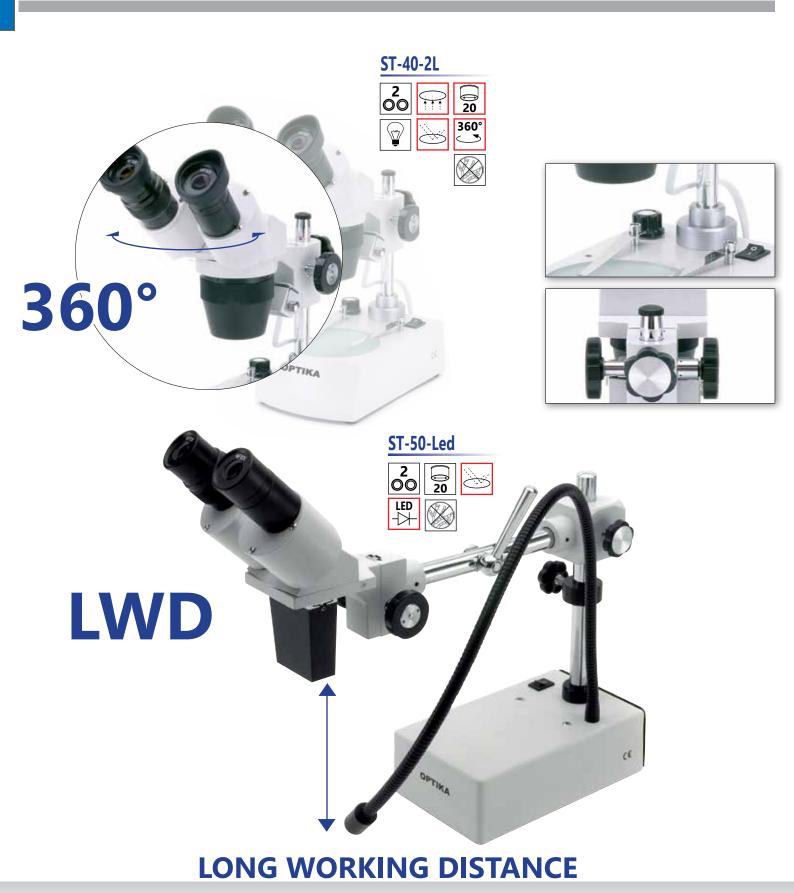

STEREO Series - **Technical specifications**

Model	Head	Eyepiece(s)	Objectives	Stand	Illumination
MS-2	Monocular 360° rotating - 45° inclined	WF10x/16mm	Fixed 2x	Pillar	Without illumination
STX	Binocular Fixed - vertical	WF10x/16mm	Fixed 2x	Pillar, with fixed holder	LED incident light with slot for 2 AA batteries (batteries not included)
S-10-P	Binocular Fixed - vertical	WF10x/20mm	Fixed 2x	Pillar	Without illumination
S-10-L	Binocular Fixed - vertical	WF10x/20mm	Fixed 2x	Pillar	Incident light - tungsten bulb
S-10-2L	Binocular Fixed - vertical	WF10x/20mm	Fixed 2x	Pillar	Incident and transmitted light - tungsten bulbs
S-20-L	Binocular Fixed - 45° inclined, forwards	WF10x/20mm	Fixed 2x	Pillar	Incident light - tungsten bulb
S-20-2L	Binocular Fixed - 45° inclined, forwards	WF10x/20mm	Fixed 2x	Pillar	Incident and transmitted light - tungsten bulbs
ST-30B-2L	Binocular Fixed - 45° inclined, backwards	WF10x/20mm	Selectable 1x-3x	Pillar	Incident and transmitted light - tungsten bulbs
ST-30-2LR	Binocular Fixed - 45° inclined, backwards	WF10x/20mm	Selectable 2x-4x	Pillar	Incident and transmitted light - tungsten bulbs
ST-30-2LF	Binocular Fixed - 45° inclined, forwards	WF10x/20mm	Selectable 2x-4x	Pillar	Incident and transmitted light - tungsten bulbs
ST-30-2Led	Binocular Fixed - 45° inclined, forwards	WF10x/20mm	Selectable 2x-4x	Pillar	LED Incident and transmitted light - rechargeable battery
ST-30-2LedR	Binocular Fixed - 45° inclined, backwards	WF10x/20mm	Selectable 2x-4x	Pillar	LED Incident and transmitted light - rechargeable battery
ST-40B-2L	Binocular 360° rotating - 45° inclined	WF10x/20mm	Selectable 1x-3x	Pillar	Incident and transmitted light - tungsten bulbs
ST-40-2L	Binocular 360° rotating - 45° inclined	WF10x/20mm	Selectable 2x-4x	Pillar	Incident and transmitted light - tungsten bulbs
ST-45-2L	Binocular 360° rotating - 45° inclined	WF10x/20mm	Selectable 2x-4x	Pillar with fixed holder	Incident and transmitted halogen lights
ST-50Led	Binocular Fixed - 45° inclined, forwards	WF10x/20mm	Fixed 2x	Overhanging	LED incident light on flexible Arm

STEREO Series - Accessories



Eyepieces (pair) WF5x/22mm.

BATTERY FOR FIELD USE

ST-30-2Led with rechargeable batteries.

Battery box: 3 x AA, 1.2V NiMh – replaceable by the user.

Battery pack: 3 x AA, 1800 mAh.

Time required for a full recharge: 10 hours.

Battery runtime with LED incident light at maximum power: 12 hours. Battery runtime with LED transmitted light at maximum power: 14 hours.

Battery charging enabled while using the microscope.

Performances estimated with batteries at their maximum efficiency.



STEREO

ST-001

ST-004 ST-005	Eyepiece micrometer WF10x/20mm.
ST-020 ST-021 ST-022 ST-025 ST-026	Objective 1x for S-10 and S-20 series. Objective 3x for S-10 and S-20 series. Objective 4x for S-10 and S-20 series. Objective 1x for ST-50Led. Objective 3,5x for ST-50Led.
ST-040 ST-041 ST-032 ST-011 ST-012 ST-014 ST-015 ST-006 ST-028 ST-009 ST-010 M-114 M-116 M-173 M-113.2	Darkfield condenser. Sample clip. Eyecups (pair) type 1. White/black object-plate, type 1 dia. 60 mm. White/black object-plate, type 2 dia. 95 mm. Glass stage, type 2, dia. 95 mm. Glass stage, type 1, dia. 60 mm. Tungsten bulb, 12V/10W. Halogen bulb 12V/10W. Dust cover type 10. Dust cover type 11 for ST-50Led. C-Mount adapter for 1/2" sensor. C-Mount adapter for 2/3" sensor. Photo adapter for APS-C and Full Frame Reflex cameras. Ring adapter, 30.5mm (for monocular and binocular microscopes).

15104 - Lens cleaner, 50ml



STX - MS-2



How to connect the cameras to our microscopes.

Please refer to the Adapter reference list on Digital section.

Headquarters and Manufacturing Facilities

OPTIKA® S.r.I. Via Rigla, 30 - 24010 Ponteranica (BG) - ITALIA - Tel.: +39 035.571.392 - Fax: +39 035.571.435 - info@optikamicroscopes.com

Optika Sales branches

OPTIKA® Spain spain@optikamicroscopes.com
OPTIKA® China china@optikamicroscopes.com

OPTIKA® USA
OPTIKA® Hungary

usa@optikamicroscopes.com hungary@optikamicroscopes.com